

SL-T3528IR-940-1.4

Absolute Maximum Ratings at Ta=25

1. Storage and operating:

2. Peak Forward Current:

Condition for is IFP pulse: Pulse Width 100µs and duty 1%.

3. Caution in ESD:

Electrical Optical Characteristics at Ta=25

	2					
Peak Wavelength	p	---	940	---	nm	I
		---	50	---	nm	I

Note:

2


Radiant Intensity Bin Code (IF=20mA)

BIN CODE	Min.(mW/sr)	Max. (mW/sr)
0	1.7	1.8
1	1.8	2.0
2	2.0	2.3
3	2.3	2.8

NOTE



Carrier Tape Specifications (Loaded Quantity: 3000pcs/reel)

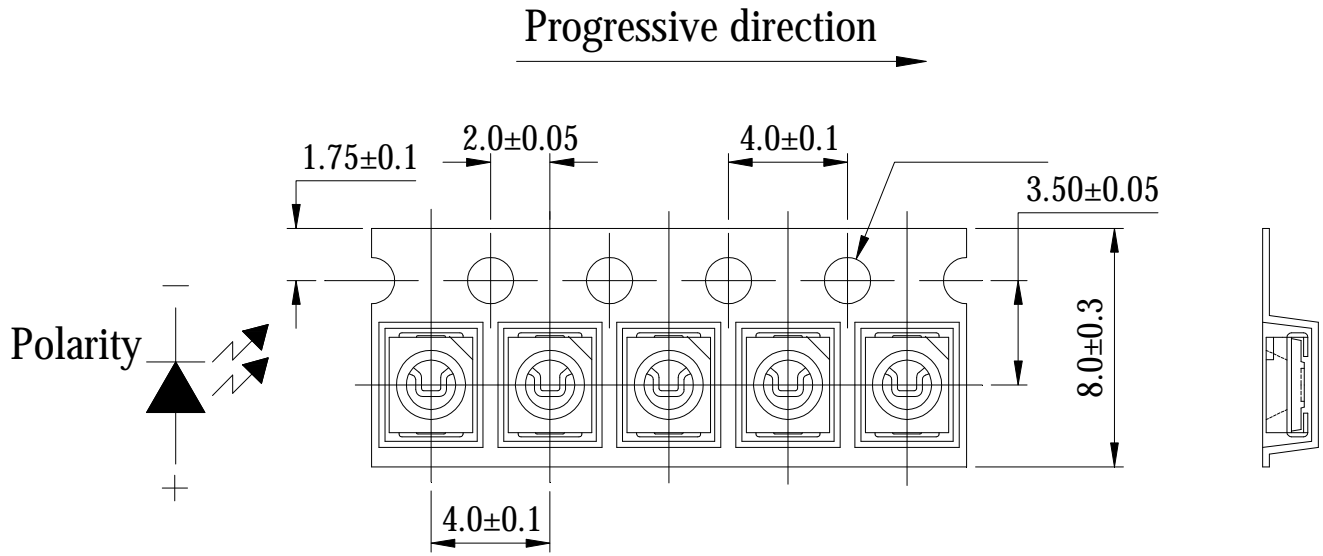

Note:

Moisture Resistant Packaging

LIGHT

