
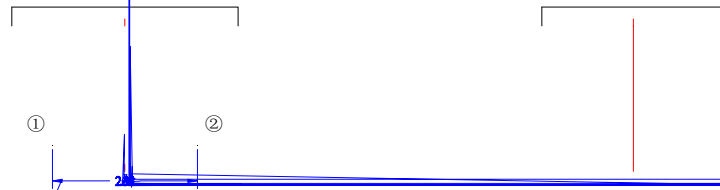


Features

- Pb free product—RoHS compliant
- High Photo Sensitivity
- Reliable and rugged
- Long life – solid state reliability
- Sensitivity angle: 35°

Package Dimension









Part NO.
SL-T4232PT

Notes:

1. All dim
2. Tol
- 3.

Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

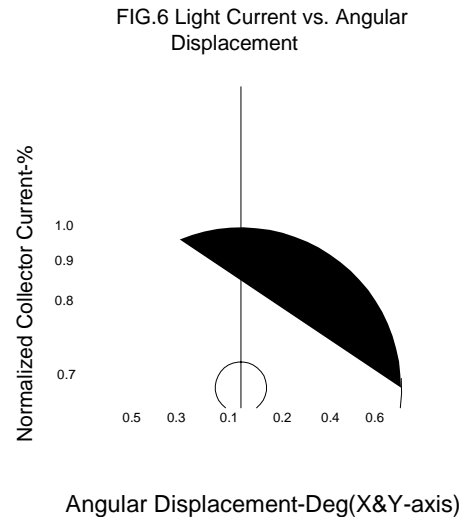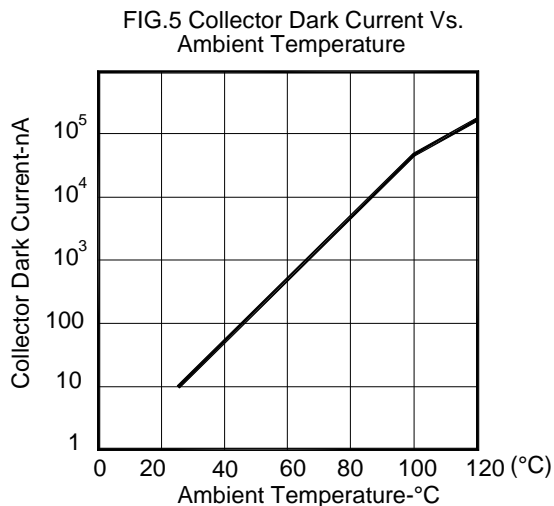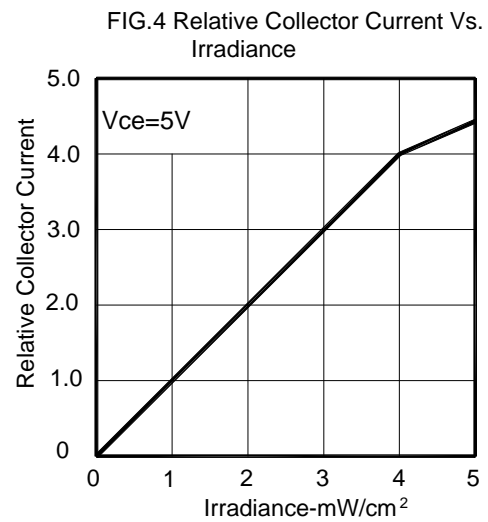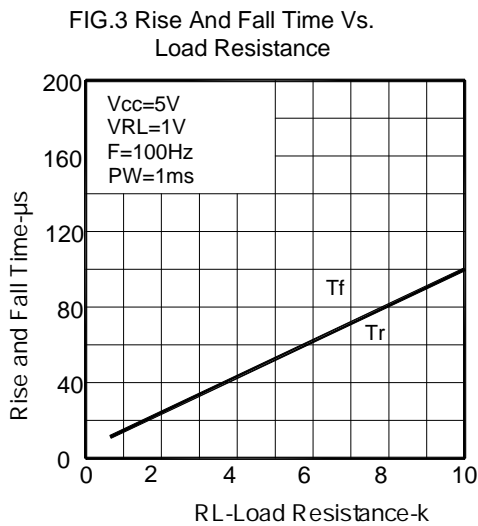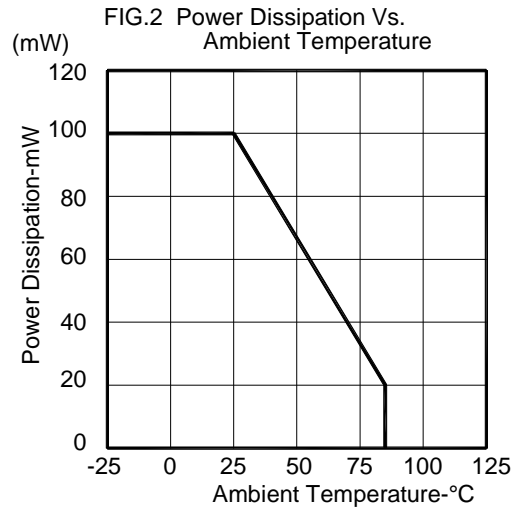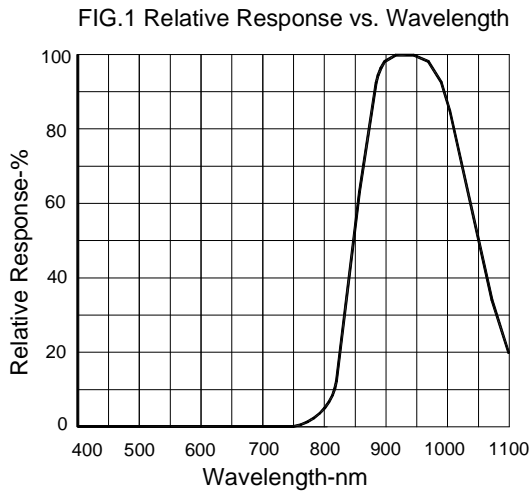





Ic(on) Bin Code ($V_{CE}=5V$, $E_e=1mW/cm^2$, $p=940$)

Label Explanation

LIGHT Universal Label

LIGHT Light Electronics CO., LTD.	
MODEL NAME: _____	 LOT NO. : _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
REMARKS: _____	

Customer Defined Label

LIGHT Light Electronics CO., LTD.	
MODEL NAME: _____	 Y: _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
CUSTOMER: _____	

