

Notes:

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.50\text{mm}$ unless otherwise noted.
3. The size marked on the drawing is Ground-Detecting Module.
4. Specifications are subject to change without notice.

Features

Pb free product—RoHS compliant

Fast response time

High sensitivity

Invisible wavelength $\lambda=940\text{nm}$

Integration structure

The four pins of the connector and the corresponding PCB pads are filled with silicone

Typical Applications

Intelligent Sweeping Robot

Absolute Maximum Ratings at $T_a=25$

| Parameter | | Symbol | Ratings | Unit |
|-------------------------------|------------------------------------|-----------|-------------|------|
| Input | Power Dissipation | P_d | 170 | mW |
| | Reverse Voltage | V_R | 5 | V |
| | Forward Current | I_F | 100 | mA |
| | Peak Forward Current ^{*1} | I_{FP} | 250 | mA |
| Output | Collector Power Dissipation | P_c | 75 | mW |
| | Collector Current | I_C | 20 | mA |
| | Collector-Emitter Voltage | V_{CEO} | 30 | V |
| | Emitter-Collector Voltage | V_{ECO} | 5 | V |
| Electrostatic Discharge (HBM) | | ESD | 4000 | V |
| Operating Temperature Range | | T_{opr} | -25 to + 65 | |
| Storage Temperature Range | | T_{stg} | -40 to + 85 | |



Note: 1. Pulse width 0.1msec, duty cycle 1/2

Electrical Optical Characteristics at Ta=25

| Input | | | | | | |
|-----------------|-------------|------|------|------|---------|----------------|
| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
| Peak Wavelength | λ_p | --- | 940 | --- | nm | $I_F=50mA$ |
| Forward Voltage | V_F | --- | 1.35 | 1.60 | V | $I_F=50mA$ |
| Reverse Current | I_R | --- | --- | 10 | μA | $V_R=5V$ |

| Output | | | | | | |
|--------------------------------------|---------------|------|------|------|---------|--------------------------------------|
| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
| Collector-Emitter Breakdown Voltage | BV_{CEO} | 30 | --- | --- | V | $I_C=0.1mA$ $E_e=0mW/cm^2$ |
| Emitter-Collector Breakdown Voltage | BV_{ECO} | 5 | --- | --- | V | $I_E=0.1mA$ $E_e=0mW/cm^2$ |
| Collector-Emitter Saturation Voltage | $V_{CE(SAT)}$ | --- | --- | 0.4 | V | $I_C=2mA$ $E_e=1.0mW/cm^2$ |
| Rise Time | T_r | --- | 15 | --- | μs | $V_{CC}=5V$ $R_L=1K$ $I_C=1mA$ |
| Fall Time | T_f | --- | 15 | --- | μs | |
| Collector Dark Current | I_{CEO} | --- | --- | 100 | nA | $V_{CE}=10V$ $E_e=0mW/cm^2$ |
| On State Collector Current | $I_{C(ON)}$ | 1.0 | 5.0 | --- | mA | $V_{CE}=5V$ $I_F=20mA$ |

PACKAGE

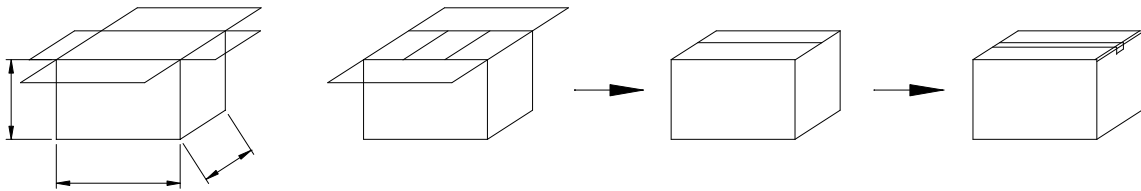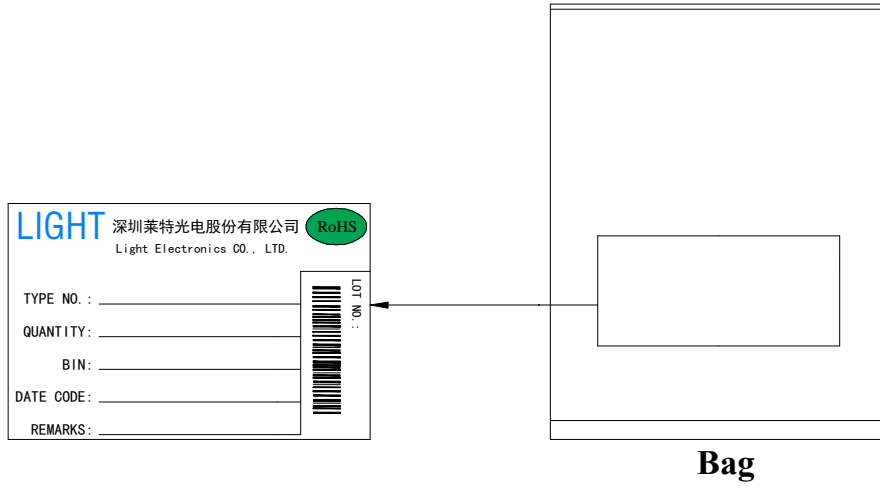

| Bag volume (pcs / Bag) | Outer Carton volume (Bag / Carton) |
|---------------------------|---------------------------------------|
| TBD | TBD |