


## Features

- Pb free product—RoHS compliant
- Low power consumption, High efficiency
- Reliable and rugged
- Long life – solid state reliability
- Viewing Angle: 120°

## Package Dimension

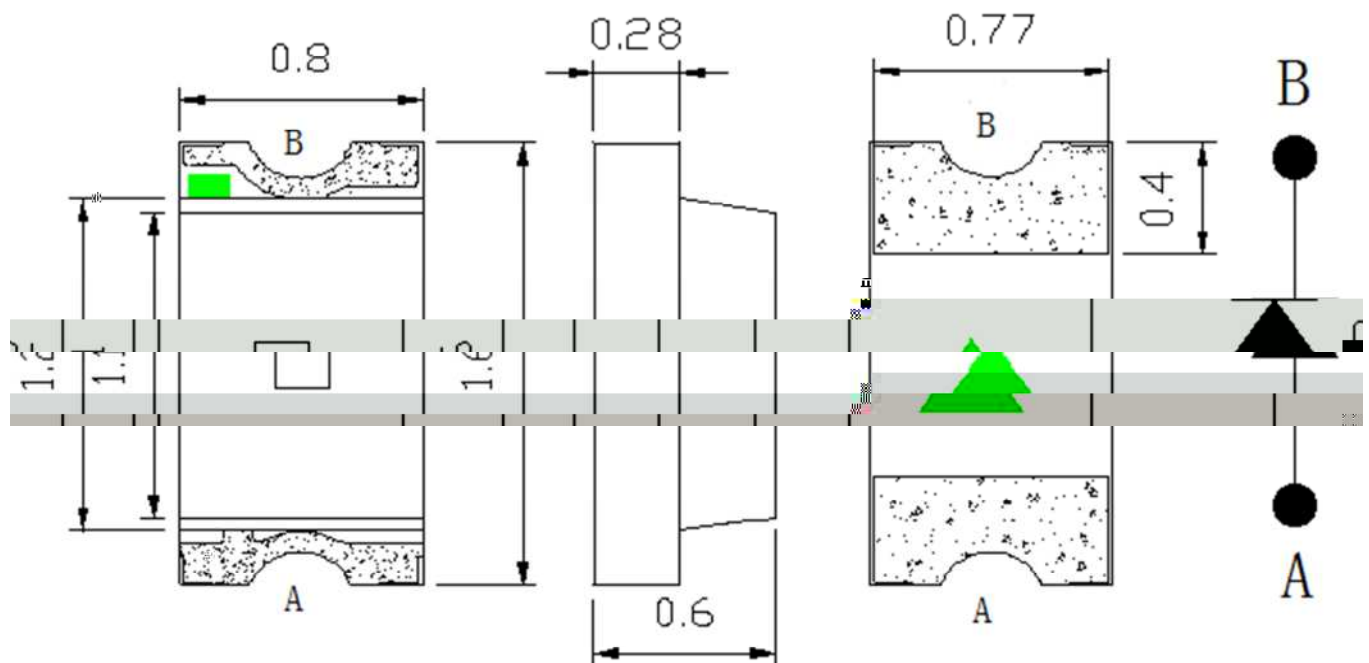


Part NO.	Lens Color	Source Color
SL-T0603WD020-L60-100	Yellow Diffused	White

### Notes:


1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.10$ mm unless otherwise noted.
3. Specifications are subject to change without notice.





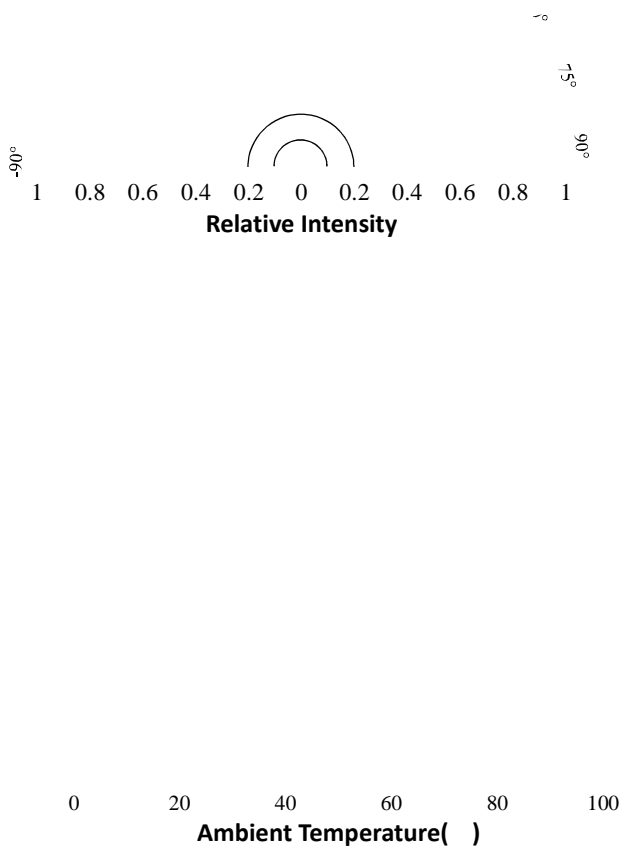


### Chromaticity Coordinates (Ta=25°C, IF=20mA)

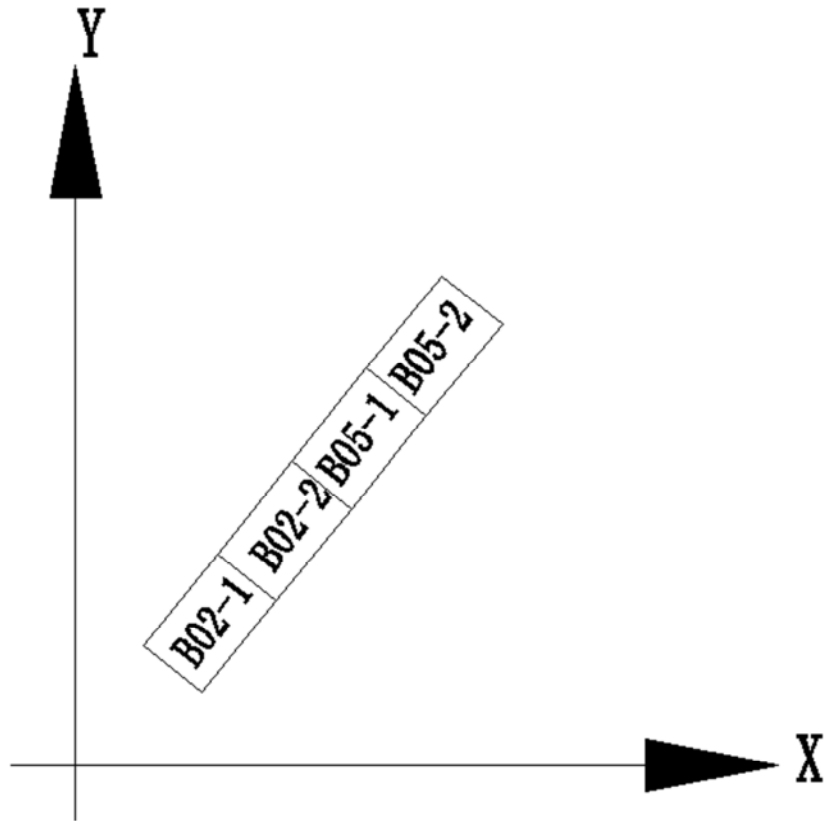


色区	X1	Y1	X2	Y2	X3	Y3	X4	Y4
B02-1	0.2716	0.2542	0.2672	0.2564	0.2713	0.2650	0.2759	0.2628
B02-2	0.2759	0.2628	0.2713	0.2650	0.2753	0.2732	0.2800	0.2710
B05-1	0.2710	0.2710	0.2710	0.2710	0.2710	0.2710	0.2710	0.2710
B05-2	0.2840	0.2792	0.2793	0.2815	0.2832	0.2898	0.2881	0.2874



### Carrier Tape Specifications (Loaded Quantity: 4000pcs/reel)

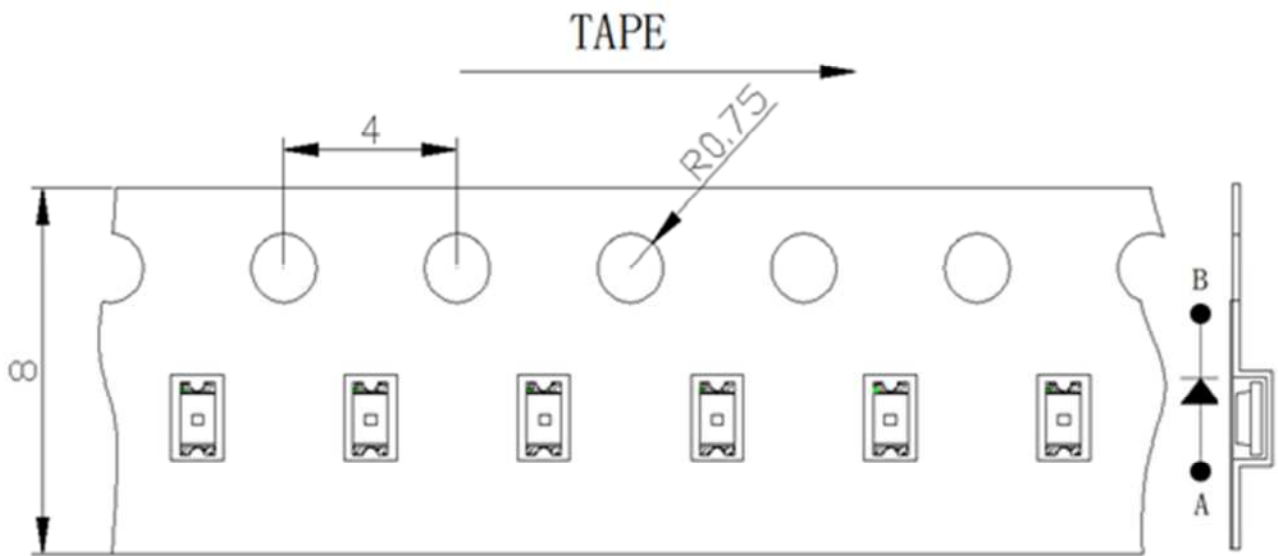

### Moisture Resistant Packaging

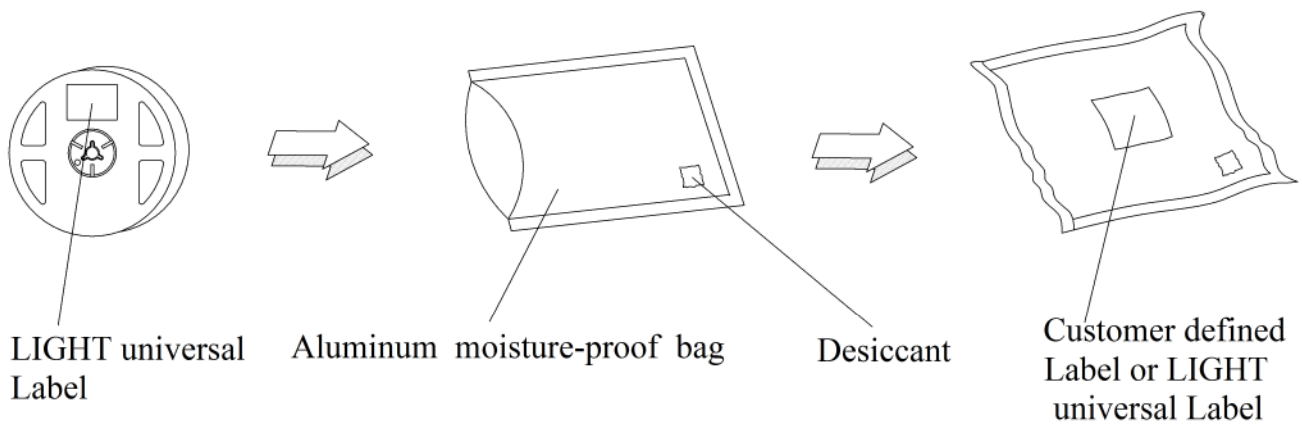



LIGHT



Suggest IR

SEC. MAX.

6 °C/SEC. MAX.

60 SEC. MAX.

1. Reflow

ng.

D620-L60-100